

LED Motion Light 9664

Instructions


PARTS



INSTALLATION

Battery Installation

- Using a cross head screwdriver (not supplied), unscrew the screw from the battery compartment and remove the cover.
- Insert 4x AA batteries (not supplied) according to the polarity guide inside the battery compartment and replace the battery cover and screw.

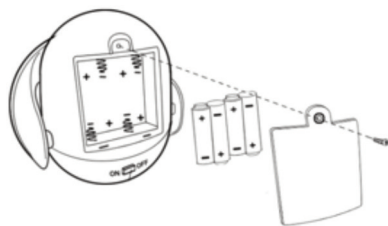


Determine the exact location where you want to install the light

There are two different installation options. It is recommended to use the hardware installation wherever possible.

Hardware Installation

- Using a cross head screwdriver remove the screw from base of the item shown on the illustration to the right.
- Hold the base against the wall and mark the centre of each hole using a pencil/marker. Make sure the narrow ends of the holes are facing upwards. Replace the base and screw.
- Drill each hole using a 2mm ($\frac{1}{16}$ in) drill bit approximately 1.9cm ($\frac{3}{4}$ in) deep.
- If you hit a wall stud use only the screws to install the light fixture. If the wall is hollow, drill the same holes again using a 6mm ($\frac{1}{4}$ in) drill bit and insert a wall anchor into each hole. Tap in each wall anchor lightly with a hammer until flush with the wall surface.
- Thread a screw into each hole or wall anchor leaving 3mm ($\frac{1}{8}$ in) of the screw unthreaded to secure the light fixture.
- Matching the holes on the base of the light fixture with the screw heads press the light fixture against the screw heads and slide downward to secure the light fixture.

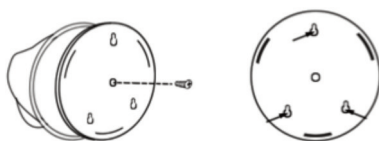


Double Sided Adhesive Strip Installation

- Choose a smooth surface for best adhesion and wipe clean.
- Peel the protective cover from one side of the adhesive strip and apply to the base of the light. For best results, place adhesive strip in a triangle shape around the base.
- Peel the protective cover from the other side of the adhesive strips and press the light fixture firmly against the smooth surface.

USE

- Slide the ON/OFF switch to the ON position.
- The swivel base rotates 360° and the lamp angle adjusts front and back to provide light where desired.
- The motion sensor (located below the LED lights) will detect motion within a 90° angle (maximum distance: 10ft).
- When motion is detected the LED lights will turn on. The LED lights will automatically shut off after 30 seconds if motion is no longer detected.
- N.B. Your LED Motion Light also contains a light sensor, so the LEDs will only come on in low light conditions.

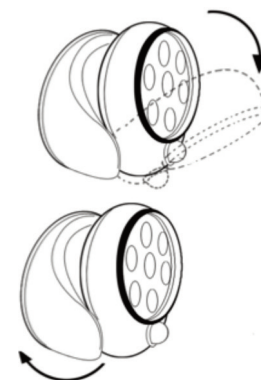

CAUTION:

- Always observe the correct polarity when inserting batteries.
- Do not mix old and new batteries.
- When performance becomes reduced, recharge or replace the batteries.

DISPOSAL

Dispose of all spent batteries, paper, cartons and plastic in accordance with your local recycling regulations. At the end of the product's lifespan please dispose of it at an authorised household waste recycling centre.



Please read carefully before use and retain for future reference.

Head Office, 11 Bridge Street,
Bishop's Stortford CM23 2JU
Tel: 0844 482 4400
Fax: 01279 756595
www.coopersofstortford.co.uk

Coopers
OF STORTFORD