



## Dimensions:

208cm x135cm x46cm

**Weight:** 11kg

**Max. weight capacity:** 300kg

**Length of power lead:** 130cm

## Power details:

220-240V AC, 50Hz, 120W

## INSTRUCTIONS FOR USE:

### Inflation

1. Move the airbed to the power source location.
2. Plug in the plug into a mains socket.
3. Turn the control dial clockwise until arrow points to the inflate symbol to inflate.
4. When the airbed is fully inflated to the desired firmness, turn dial to the "OFF" setting.



Fig. 1



Fig. 2

5. Lie down on the airbed to test the firmness.
6. If the sleeping surface is too hard, adjust the firmness by turning the control dial counter-clockwise gradually until air starts to exit through the air passage (see Fig. 1). Turn the control dial to the "OFF" position when the desired firmness is achieved (see Fig 2). If the airbed becomes too soft repeat step 3 to step 6 as necessary.
7. Disconnect the power cable from the mains socket, place it inside the cord compartment and close the cover.

### Important Note

#### Proper inflation of the airbed.

The ambient temperature of the air has an effect on the airbed's internal pressure. At low ambient temperature the air will contract within the airbed and the airbed will feel softer: add air as necessary. At high ambient temperature the air within the airbed will expand significantly and the airbed will become hard and may burst; release air to avoid damage to the airbed or to soften the feel. Do not expose the airbed to extreme temperatures (hot or cold).

Stretching is a natural characteristic of new vinyl. During initial use, the airbed may become soft and require


Head Office, 11 Bridge Street,  
Bishop's Stortford CM23 2JU  
Tel: 0844 482 4400\*  
Fax: 01279 756 595  
www.coopersofstortford.co.uk

**Coopers**  
OF STORTFORD


\*Calls cost 7 pence per minute plus your  
telephone company's network access charge

additional inflation to maintain the desired firmness. This is normal for the first few days of use.  
Dimensions shown are approximate and will vary due to the vinyl temperature and the air temperature.

### Deflation

1. Open the power cable compartment cover.
2. Plug in the power cable into a mains socket.
3. Turn the control dial counter-clockwise until arrow points to deflation mark 
4. When the airbed is completely deflated, begin rolling the airbed from the foot of the airbed towards the head of the airbed where the pump is located.
5. When all air is removed from the airbed, press "OFF" to switch OFF.
6. Disconnect the mains cable from the wall socket, place it inside the cord compartment and close the cover.


### Inflation Option

1. If electrical power is not available then a conventional foot or manually operated air pump can be connected to the control dial valve for inflation.
2. Turn the control dial clock-wise until arrow points to the inflation mark 
3. Insert air pump nozzle to the control dial valve to inflate the airbed.

### IMPORTANT

Inflate only with a low pressure inflator. Do not over inflate. Fill with cold air only.

### Storage instructions

1. Deflate the airbed following the "DEFLATION" instructions.
2. Turn the control dial counter-clockwise until the arrow points to the deflation mark ().
3. Make sure the airbed is clean and dry.
4. Lay bed flat with sleeping surface facing upwards and follow the steps on Figures 1 to 5. Fold the bed loosely and avoid sharp bends, corners and creases which can damage the airbed.

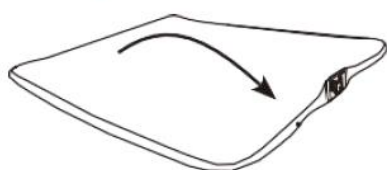


FIG (1)



FIG (2)




FIG (3)




FIG (4)




FIG (5)

5. Turn the control dial fully clock-wise.
6. Store in a dry, cool storage location.

## **WARNINGS AND SAFETY INSTRUCTIONS:**

TO REDUCE THE RISK OF BURNS, FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS:

- INFANTS HAVE SUFFOCATED ON INFLATABLE MATTRESSES. NEVER PLACE INFANT AGED BIRTH TO 15 MONTHS TO SLEEP ON THIS INFLATABLE AIR MATTRESS/AIR BED. INFANTS CAN SUFFOCATE ON AN UNDERINFLATED OR DEFLATED MATTRESS, ON BEDDING, BY CO-SLEEPING WITH ANOTHER PERSON, AND BY ENTRAPMENT BETWEEN THE MATTRESS AND A VERTICAL SURFACE.
- CHILDREN CAN BE ENTRAPPED BETWEEN THE INFLATABLE MATTRESS AND AN ADJACENT VERTICAL SURFACE. PROVIDE AT LEAST A SHOULDER WIDTH SPACE BETWEEN THE INFLATABLE MATTRESS, AIRBED AND ADJACENT VERTICAL SURFACES SUCH AS WALLS, DRESSERS OR OTHER OBJECTS.
- ALWAYS KEEP THE INFLATABLE MATTRESS FULLY INFLATED WHEN IN USE.
- NEVER INTRODUCE ANY FLAMMABLE SUBSTANCE INTO THE INFLATABLE AIRBED, SUCH AS AEROSOL, TYRE REPAIR PRODUCTS, AS IT MAY IGNITE OR EXPLODE.
- FOR INDOOR HOUSEHOLD USE ONLY.
- UNPLUG FROM SOCKET BEFORE PUTTING ON OR TAKING OFF PARTS.
- CLOSE SUPERVISION IS NECESSARY WHEN THIS FURNISHING IS USED BY, OR NEAR CHILDREN OR DISABLED PERSONS.
- USE THIS FURNISHING ONLY FOR ITS INTENDED USE AS DESCRIBED IN THESE INSTRUCTIONS. DO NOT USE ATTACHMENTS NOT RECOMMENDED BY THE MANUFACTURER.
- DO NOT OPERATE WHERE AEROSOL (SPRAY) PRODUCTS ARE BEING USED OR WHERE OXYGEN IS BEING ADMINISTERED.
- THIS IS NOT A TOY. CHILDREN MUST NOT BE LEFT UNATTENDED WHEN USING THE AIRBED.
- DO NOT WALK, STAND ON OR JUMP ON OR USE THE AIRBED AS A TRAMPOLINE.
- DO NOT USE ON OR NEAR WATER. THIS IS NOT A RAFT.
- DO NOT SET UP BED NEAR STAIRS, DOORS, SHARP EDGES OR BREAKABLE OBJECTS. PROVIDE ADEQUATE SPACE BETWEEN THE BED AND OBJECTS TO AVOID ENTRAPMENT.
- MAKE SURE THE AREA IS FLAT, SMOOTH, AND FREE OF SHARP OBJECTS THAT COULD PUNCTURE THE BED AND KEEP AWAY FROM LEDGES.
- KEEP PETS AWAY FROM THE AIRBED. PETS MAY PUNCTURE THE SURFACE OF THE BED.
- AVOID SLEEPING ON THE EDGE OF THE AIRBED. EDGES PRODUCE LESS SUPPORT THAN THE MIDDLE OF THE BED.
- DO NOT OPERATE AIR PUMP FOR MORE THAN 5 MINUTES AT A TIME. LET PUMP COOL AT LEAST 15 MINUTES BETWEEN USES.
- UNPLUG ELECTRICAL POWER CABLE WHEN NOT IN USE. TO DISCONNECT, TURN ALL CONTROLS TO THE OFF POSITION, THEN REMOVE PLUG FROM SOCKET.
- NEVER OPERATE THE FURNISHING WITH THE AIR OPENINGS BLOCKED. KEEP THE AIR OPENINGS FREE OF LINT, HAIR AND THE LIKE. NEVER DROP OR INSERT OBJECTS INTO ANY OPENING.
- NEVER OPERATE THIS FURNISHING IF IT HAS A DAMAGED CABLE OR PLUG, IF IT IS NOT WORKING PROPERLY, IF IT HAS BEEN DROPPED OR DAMAGED, OR DROPPED INTO WATER.
- IF THE POWER CABLE IS DAMAGED IT MUST BE REPLACED BY THE MANUFACTURER IN ORDER TO AVOID A HAZARD.
- DO NOT RUN CABLE UNDER CARPETING. DO NOT COVER CABLE WITH THROW RUGS, RUNNERS OR SIMILAR COVERINGS. DO NOT ROUTE CABLE UNDER FURNITURE OR APPLIANCES. ARRANGE CABLE

AWAY FROM TRAFFIC AREA AND WHERE IT WILL NOT BE TRIPPED OVER. KEEP THE CABLE AWAY FROM HEATED SURFACES.

### PLUG WIRING (UK & IRELAND)

This appliance is fitted with a moulded BS 1363 13-amp plug. If you have to replace the fuse, only those that are ASTA or BSI approved to BS1362 and with a rated current of **3-amps** should be used.

If there is a fuse cover fitted, this cover must be re-fitted after changing the fuse. If the fuse cover is lost or damaged the plug must not be used. Spare fuse holders and fuses are available from electrical outlets. If the socket outlets in your home or office are not suitable for this product's plug, the plug must be removed and disposed of safely. Attempts to insert the plug into the wrong socket is likely to cause electric hazard.

### CARE AND CLEANING INSTRUCTIONS:

- To reduce the risk of electric shocks: Always unplug this furnishing from the electrical outlet before cleaning.
- No air pump maintenance is required. The air pump has no serviceable parts.
- For cleaning use only mild soapy solution. Do not use any chemicals.
- In case of repairs, use only common PVC repair glue and patches.

### DISPOSAL

- Dispose of all packaging, paper, cartons, plastic and plastic bags in accordance with your local recycling regulations.
- At the end of the product's lifespan please dispose of it at an authorised household WEEE waste recycling centre.

