
Please read and retain these instructions for future reference


v001: 07/10/19

Parts

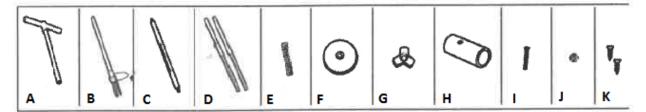


- A. T-shaped handle
- B. 3-pronged tube
- C. Slotted ejector tube
- D. x2 Ejector tubes
- E. Spring
- F. Rounded cap
- G. Ejector cap
- H. Plastic sleeve
- I. 1" (length) Screw
- J. Hex nut

K. (x2) ¾" (length) screws



- 2. The slotted ejector tube (C) has letters embossed on each end (A&B). Insert the ejector tubes into the T-shaped handle (A) with the letter B going in first. Make sure the slot on the slotted ejector tube (C) is facing in the same direction as the screw holes on the end of the T-shaped handle tube.
- 3. Slide the spring (E) over the top part of the ejector tube.(T-shaped handle end).
- 4. Slide the rounded cap (F) over the top part of the ejector tube. Secure the rounded cap by threading a ¾" (length) screw (K) through the centre of the rounded cap into the ejector tube.
- 5. Slide the plastic sleeve (H) over the ejector tube (opposite end to the rounded cap) onto the T-shaped handle. Make sure the end with the wider slots (inside sleeve) is inserted first.
- 6. Slide the 3-pronged tube (B) over the ejector tube and the connection point of the T-shaped handle. Make sure the slots (opposite end to prongs) on the 3-pronged tube line up with the compressed tubing sides on the connection point of the T-shaped handle.

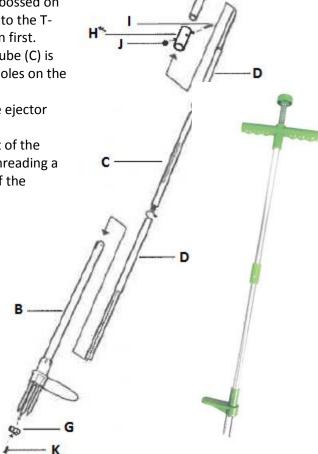

Head Office, 11 Bridge Street, Bishop's Stortford CM23 2JU Tel: 0844 482 4400* Fax: 01279 756 595 www.coopersofstortford.co.uk



Please read and retain these instructions for future reference

v001: 07/10/19

You may need to push firmly to ensure all four holes line up (2 in front and 2 behind).


- 7. Place the ejector cap (G) with the flat surface facing outward over the ejector tube (between the prongs) and secure it by threading in a ¾" (length) screw (K) through the ejector cap into the ejector tube.
- 8. Slide the plastic sleeve over the connection point of the T-shaped handle and the 3-pronged tube. Make sure the holes line up on both sides.
- 9. Insert the hex nut (J) into the plastic sleeve (into the hexagon-shaped opening). Hold the hex nut with one hand as you thread the 1" (length) screw (I) (through the plastic sleeve, T-shaped handle and 3-pronged tube) into the hex nut from the opposite end.

Caution:


- This item is not a toy; Keep it away from children.
- Exercise care to prevent injury when using the long handled weeder. Use for removing weeds only.
- Do not use the item to loosen dirt.

Instructions for Use:

For best results, wet the soil before using the Long Handled Weeder.



Push weeder into the ground



Twist weeder to grip then lift up

PUSH DOWN



Push rounded cap to release

DISPOSAL

- Dispose of all packaging, paper, cartons, plastic and plastic bags in accordance with your local recycling regulations.
- At the end of the product's lifespan please dispose of it at an authorised household waste recycling centre.

