


WARNINGS:

- This is NOT a toy.
- Do NOT use on inclines as it may cause the seat to tip.
- Do NOT over-inflate the tyres.
- Do NOT use if any part is damaged or broken.
- Maximum weight capacity of tool tray: 2.2KG
- Maximum tyre pressure: 30 PSI
- Maximum weight load: 110 KG

PARTS & ASSEMBLY:



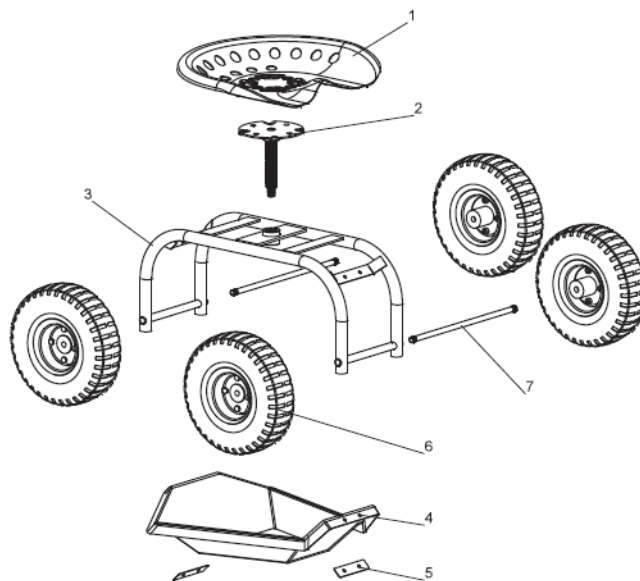


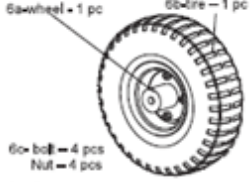






















Wheeled Garden Seat 10541

Instructions for Use

Please read and retain these instructions for future reference



v001: 30/09/16

1. Seat  1 pc	2. Seat Post  1 pc	3. Cart Frame  1 pc
4. Plastic Tool Tray  1 pc	5. Brackets  2 pcs	6. Wheel  4 pcs
7. Wheel Axles  2 pcs	<p>Tools required for assembly (not included): Phillips Screwdrivers & Adjustable Wrench</p> <div style="border: 1px solid black; padding: 5px; display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Phillips Screwdriver </div> <div style="text-align: center;">  Adjustable Wrench </div> </div>	

Item	Item Name	Diagram	Quantity
A	Bolt (M6 x 15)	 	4 Pcs
B	Bolt (M10 x 20)	 	4 Pcs
C	Nut (M6)	 	4 Pcs
D	Nut (M10)	 	4 Pcs
E	Split pin		4 Pcs
F	Nut (M16)	 	1 Pc
G	Flat Washer (Ø6)	 	4 Pcs
H	Flat Washer (Ø12)	 	4 Pcs
I	Flat Washer (Ø16)	 	1 Pc

Step 1: Attach the plastic tool tray (part 4) to the cart frame (part 3) with the brackets (part 5) using the bolts (part A), washers (part G) and nuts (part C).

Make sure that all of the bolts and nuts are tightened.

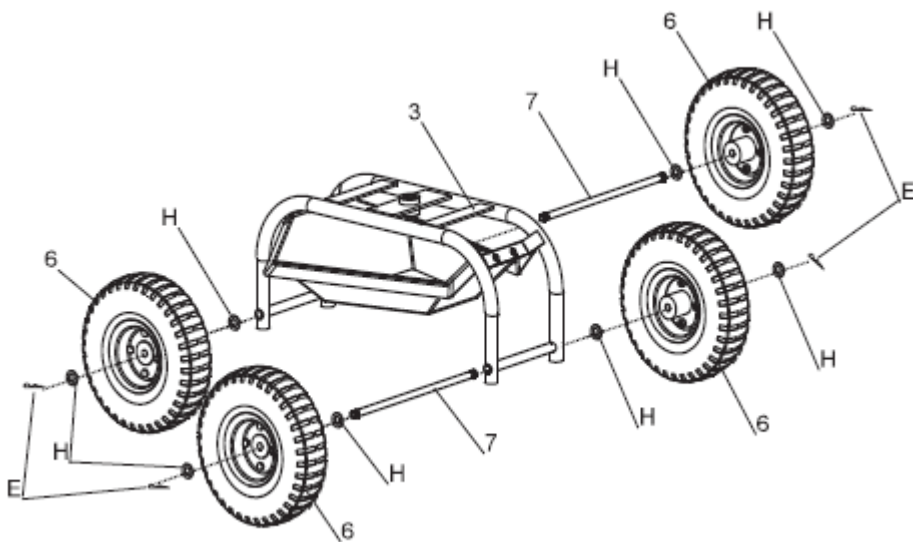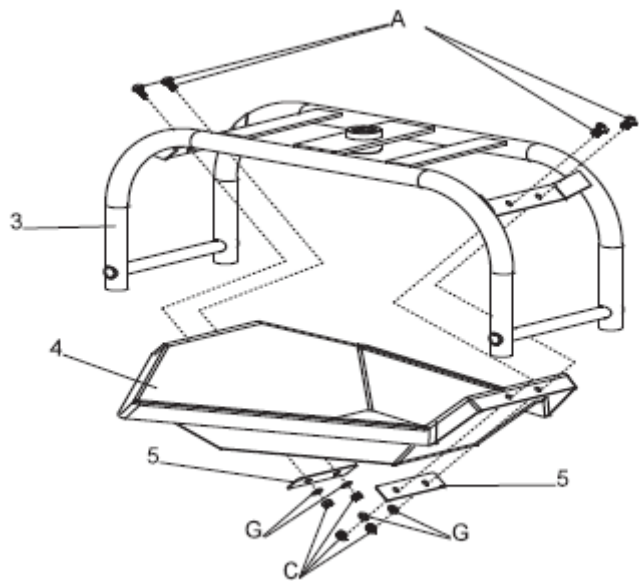


Step 2: Insert wheel axles (part 7) through the holes on the cart frame (part 3) and then attach the pneumatic tyres (part 6) using the washers (part H) and the split pins (part E).




Step 3: Attach the seat (part 1) to the seat post (part 2) using bolts (part B), washers (part H) and nuts (part D).

Make sure that all of the bolts and nuts are tightened.

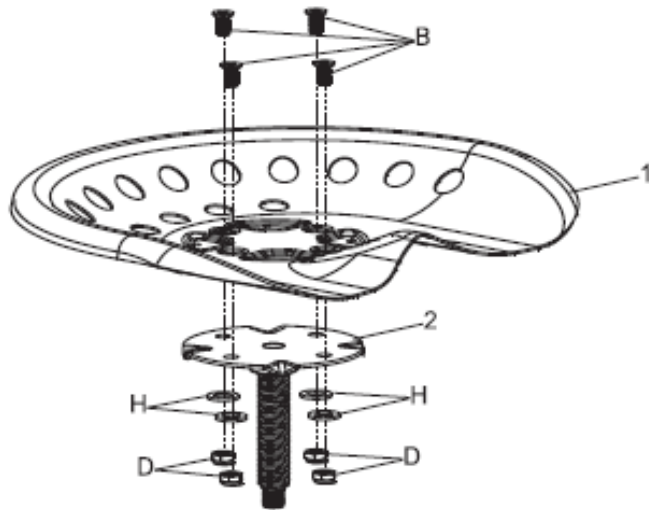

Step 4: Thread the seat post in a clockwise motion until the threaded post can be seen under the cart frame and then use washer (part I) and nut (part F) to secure it in place.

Make sure that all of the bolts and nuts are tightened.

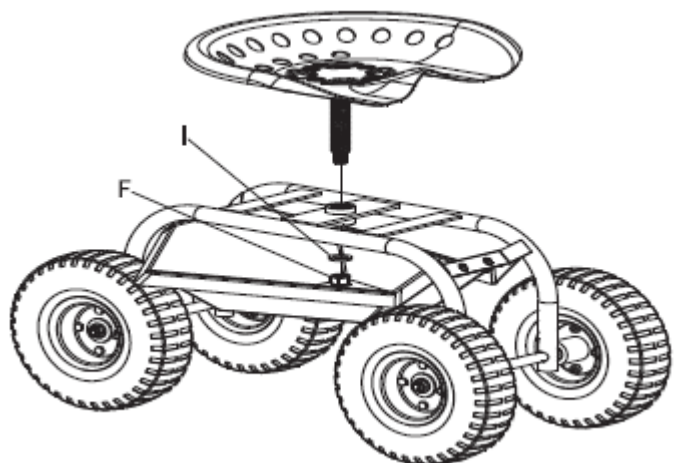

NOTICE: Nut (part F) and washer (part I) are attached to the seat bracket. The seat height can be adjusted by rotating the seat clockwise or anti-clockwise.

DISPOSAL:

- Dispose of all packaging, paper, cartons and plastic, plastic bags in accordance with your local recycling regulations.
- At the end of the product's lifespan please dispose of it at an authorised household WEEE waste recycling centre.