



**Please read all instructions before starting assembly.
Please remove any packaging material from around the light bulb.**


1. Take all the lamp parts from the carton and put them carefully aside.
2. Please remove the black rubber bushing that surrounds the wires at the base. This bushing is used for protecting the wires in shipment and must be removed before assembly. Take the Flex Pole and thread the Power Cord through the Lower Pole. Twist Lower Pole clockwise into Flex Pole, taking care not to pinch the wire. See illustration 1.
3. Connect the two ends of the Power Cord using the Lock Connectors. See illustration 1.
4. Carefully tuck excess Power Cord into the Lower Pole. **DO NOT CUT OR SHORTEN THE POWER CORD.**
5. Insert the Flex Pole and the Lower Pole into the Base. See illustration 1.
6. Check direction of the lamp and line up the hole in Base and Pole, then use a screwdriver to tighten the screw into the hole. See illustration 1. **BE VERY CAREFUL NOT TO PINCH ANY PART OF THE CORD BETWEEN ANY METAL PIECES.**

LIGHT BULB INSTALLATION

1. Insert the Bulb into the Clips on the lamp head. See illustration 2. Put one side of the bulb against one clip, then gently push the second clip to insert the other side of the bulb. **DO NOT PUSH FORCEFULLY ON THE GLASS TUBES, AS THEY COULD SHATTER AND CAUSE SERIOUS INJURY. ALWAYS ALLOW BULB TO COOL BEFORE ATTEMPTING TO REPLACE.**
2. Gently push the bulb into the Socket. See illustration 2. When the bulb is seated properly, you will hear a click.
3. Plug lamp into outlet and enjoy restful, natural light.

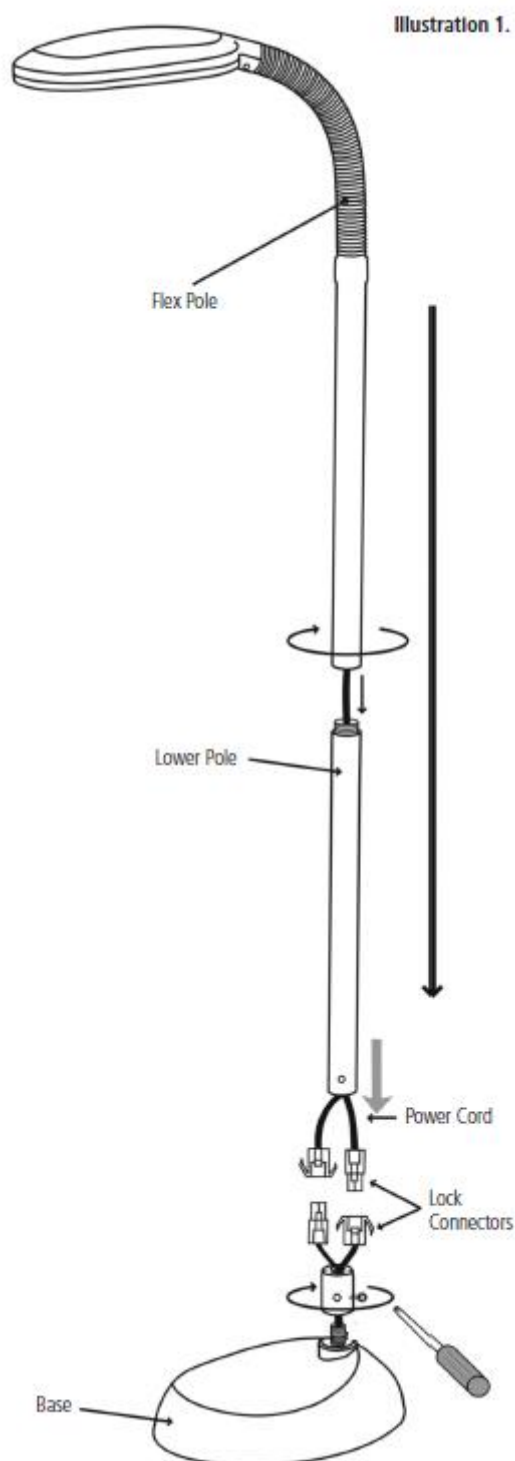

 Keep lamp at least 20cm away from walls and objects.

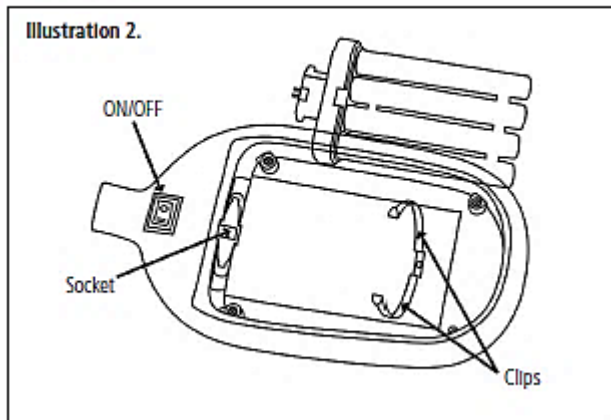

DISPOSAL

- Dispose of all packaging, paper, cartons and plastic, plastic bags in accordance with your local recycling regulations.
- At the end of the product's lifespan please dispose of it at an authorised household WEEE waste recycling centre.



This luminaire is suitable for use with FML27w bulbs.

Not suitable for use with dimmer switches.



PLUG WIRING (UK & IRELAND)

This appliance is fitted with a moulded BS 1363 13-amp plug. If you have to replace the fuse, only those that are ASTA or BSI approved to BS1362 and with a rated current of 3-amps fuse should be used.

If there is a fuse cover fitted, this cover must be re-fitted after changing the fuse. If the fuse cover is lost or damaged the plug must not be used. Spare fuse holders and fuses are available from electrical outlets. If the socket outlets in your home or office are not suitable for this product's plug, the plug must be removed and disposed of safely.