


Beatrice Garden Arbour BA101/2

There will be 6 components for this assembly and they are as follows:

Part 1 & 2 : Left & Right side panel

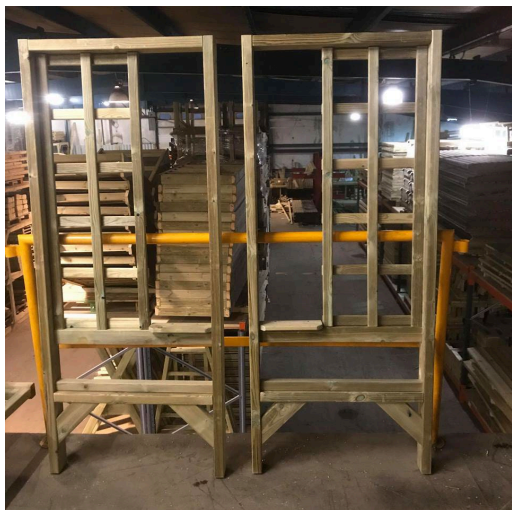

Part 3 : Trellis panel



Part 4: Support bar



Part 5: Seat



Part 6: Roof Panel



1. Take the side panels (parts 1 & 2) and lie them down as in the photo, making sure the cup holders are at the top facing inwards. Then take the back trellis (part 3) and place it in between the two side panels, flush to the top ensuring the thicker piece of wood on the trellis is at the top, and the downwards laths are on top/inside the assembly (see picture). Once in place screw the trellis into the side panels, using 2 screws each side, as indicated by the arrows.



2. Take the rear support bar (part 4) and place this between the 2 side panels and push it up flush to the bottom of the trellis panel. When in position screw in place using 2 screws each side as indicated by the arrows. You may need to insert the screws at a slight angle, as per the picture, to gain maximum support.



3. Stand the arbour assembly upright. Once upright place the seat into the arbour, ensuring the seat unit is resting on top of the ledges on each side panel. Once in position screw in the seat. Using 4 of the screws, screw through the outside of the side panels into the sides of the seat panel. Using 2 screws each side as indicated by the arrows.



4. The final stage is to place the roof over the arbour. You may need to adjust the roof panel to ensure it is in alignment. Once in the correct position screw into place, using 2 screws each side as indicate by the arrows.



Your arbour is now complete and ready for use.



PRODUCT INFORMATION – PLEASE READ

Thank you for making the decision to purchase our eco-friendly garden products.

When first delivered your item may appear to look slightly green in colour. This is due to the Tanalith-E treatment which the wood has been pressure treated with and is evidence of thorough treatment. The green tint will fade as the treatment fully settles and the furniture is exposed to the elements. There may be residue of the treatment in a dry form around the knots which can be easily wiped off with a cloth or stiff brush. This will not affect the efficiency of the treatment.

We made the decision to have our furniture pressure treated as it is the best possible way to ensure that you will get maximum life out of your garden furniture. The pressure treatment process can protect the timber against rot for as long as 15 years which means that we are manufacturing responsibly and showing care for the environment. However, during the pressure treatment process some of the natural oils and resins are removed from the timber during the vacuum and pressure treating stages, and replaced with the Tanalith-E treatment. This means that the timber can be more prone to splits and cracks than non-treated timber. During hot or dry spells, the grain can open and splits or cracks may appear along the grain lines, this is of no detriment whatsoever to the longevity of the product and is a completely natural characteristic due to wood being a natural product. When the weather is damp or humid then the timber will absorb moisture from the air, the grain will swell, and the splits or cracks will lessen or disappear. Your timber product does not need further preservative treatment to stop it from deteriorating, however, we do advise that it is coated on all surface areas with a garden furniture oil or wood protective treatment soon after delivery, and then annually to moisturise and weather proof the timber and help to protect against UV damage.