





1. Insert either end of tube (1) into connectors (E).
2. Insert tube (4) into each connector (E) on the end of tube (1).
3. On the end of both these tubes add the connector (D). Repeat this process and connect both parts with tube (2) to form the base.
4. Insert tube (3) into each of the 8 connectors.
5. Add connector (E) to each tube and insert tube (3) vertically only.
6. Insert tube (2) horizontally to make the shelf supports.
7. Insert tube (3) into the 8 connectors as before, add connector (E) to 3 of the tubes on each side, add connector (d) to the two remaining tubes.
8. Insert tube (2) as before to join the structure.
9. Insert tube (3) into the 3 (E) connectors on each side and add connector (A) to the two tubes at the front of the greenhouse and the two tubes in the middle at the back. Use connector (E) for the two corners at the back.
10. Use tube (2) to connect each of the sides together, use tube (4) to connect the small gap at the back and use tube (1) to connect the large gap at the back.
11. Insert tube (5) into each end of the connector (J) making the arch of the roof.
12. Insert each end of the arch into the connectors (E) at the back of the greenhouse, do the same for the front and connect together using tube (2).

Instructions for use


- When opening the door to the Stortford Grow House, always roll up the door and tie at the top. This will prevent damage to the door that could occur if the door is not tied open.
- Store in a sheltered location during periods of extreme weather and high winds.
- Over exposure of extreme weather may reduce the life of the cover.
- Use the metal hooks and rope to help secure the Grow House in high winds.

Parts and assembly

Number	Picture	Qty	Number	Picture	Qty
1		3	J		2
2		15	D		6
3		22	E		20
4		14	B		4
5		4			
A		4	C		1

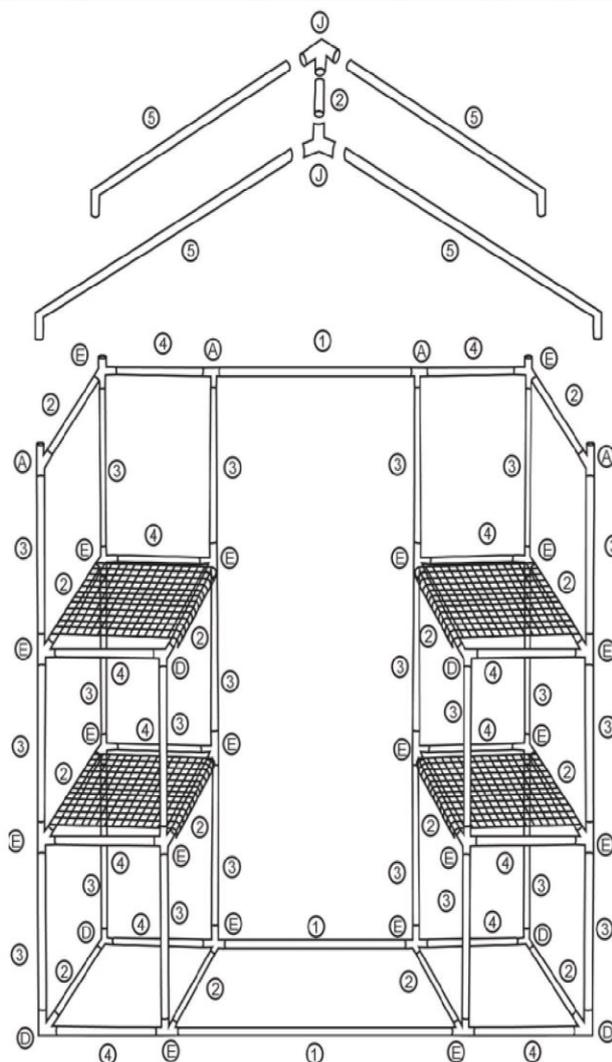

Metal Hooks (8)



Rope (1pc/2m)



DISPOSAL:

- Dispose of all packaging, paper, cartons and plastic, plastic bags in accordance with your local recycling regulations.
- At the end of the product's lifespan please dispose of it at an authorised household WEEE waste recycling centre.