



Assembly Instructions **Log Chest**

Code: 25250

v8




(W x D x H) 1.80m x 0.72m x 0.84/0.76m



ONLINE ASSEMBLY VIDEO AVAILABLE

Please scan the QR code or visit zestoutdoorlivingsupport.co.uk



PLEASE KEEP THESE INSTRUCTIONS



Every Zest product is unique because each piece of timber has its own distinctive, natural features.

Zest sources all of its timber from responsibly-managed forests and everything it designs and produces meets the highest standards of sustainability. Zest ensures that all timber and timber-related products are certified to Forestry Stewardship Council (FSC®).

This is vital not only for the health of the planet, but also shows Zest's commitment to the environment and to responsible sourcing. Timber is a natural material and, as such, will fit beautifully within any outdoor space. This also means that all Zest pieces are unique because every piece of timber has its own distinctive features.



Natural and Unique...

Changes in temperature and humidity will cause expansion and contraction so Zest products need time to adjust to where the owners live. A few splits or cracks are part of the maturing process and will not affect strength or durability. Knots embedded in the wood are natural and tell the story of the tree which made them. Customers may notice variations in colour but, once out in the garden and exposed to the sun, colour and shading will even out.


Most Zest products are pressure treated which protects the timber from rot and means customers will be able to enjoy the products in their garden for many years.

Fresh pressure treatment sometimes leads to a small amount of green-spotting on the surface of new timber as the natural salt leaves the wood. This will fade away over time and is in no way detrimental to quality or durability.


Splits and cracks occur naturally in the timber grain due to changing temperatures and humidity levels. They are not usually a cause for concern as they don't affect the strength or durability of the product. If however, a 2p coin can fit into the split or crack there may be an issue so it should be reported to the retailer in writing with photographic evidence.

The benefits of slow grown timber


“ Slow grown timber from Eastern Europe is ideal for timber garden furniture. It produces a stronger grain in the wood giving it more durability and is said to be as strong as some hard woods. ”



Normal splits are characteristics of timber.



Knots are characteristics of timber.



Sun Bleaching & Green Spotting are not causes for concern and they will fade over time when items are placed outdoors.



Should you find a large split or dead knot, please email a photo to your retailer for investigation.

Log Chest Assembly Instructions


Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, (Hex Bit Included).

Please take a few moments to check all pack contents listed




Log Chest Pack List			
Code	Item	Description	Quantity
15746	A1	Side Wall Panel (Right)	1
15926	A2	Side Wall Panel (Left)	1
15927	B	Back Wall Panel	1
15928	C	Front Wall Panel	1
15784	D	Base Panel	1
13757	E	Top Panel	1

15933 - Log Chest Fixings List		
Item	Description	Quantity
1	50mm Screws	18
2	30mm Screws	12
3	Hinges	2

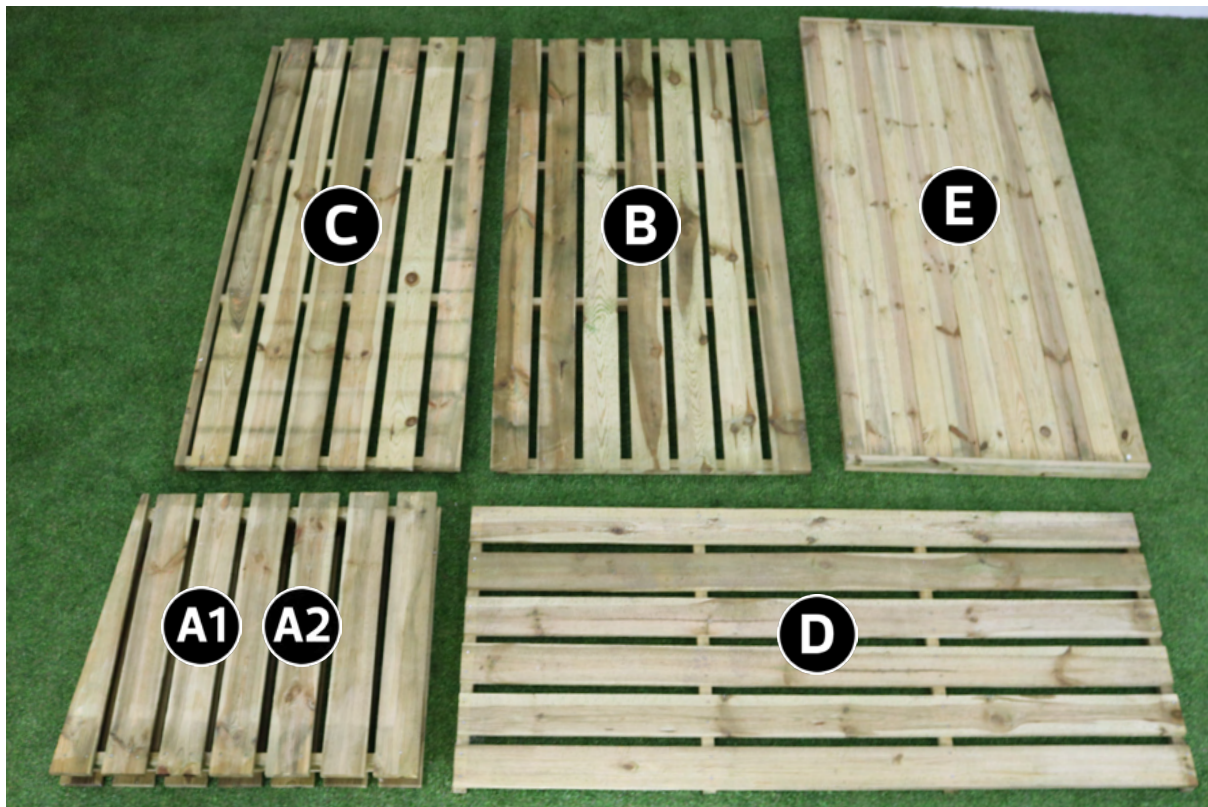

This product is made from pressure-treated timber. It should not be painted or coated with any other treatment until at least 6 months after purchase



1

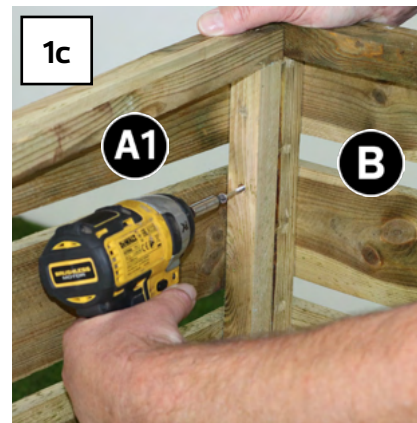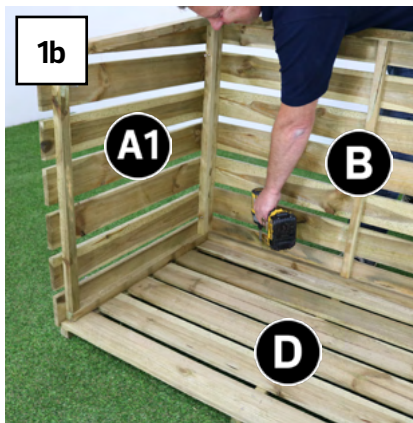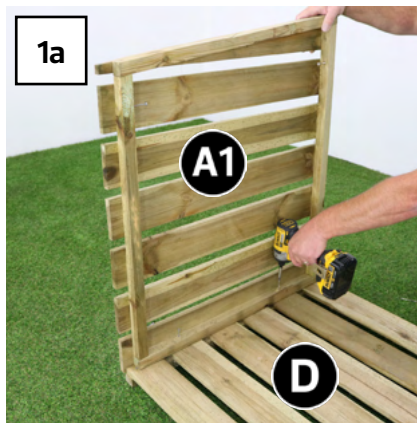

Place Floor Panel (D) on a flat surface. Position Panel (A1) with the lowest angle to the front allowing board overlap ensuring side panel is flush with base. Fix using 2x 50mm screws as per image.

Position Back Panel (B) to Floor Panel (D) ensuring side of Back Panel (D) fits flush against Side Panel (A1) and fix using 3x 50mm screw through Back Panel (B) into Floor Panel (D) use 2x 50mm screws to screw Side Panel (A1) through into Back Panel (B)

2

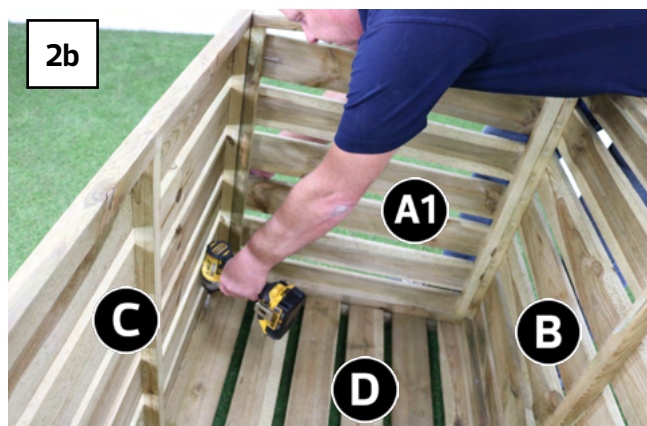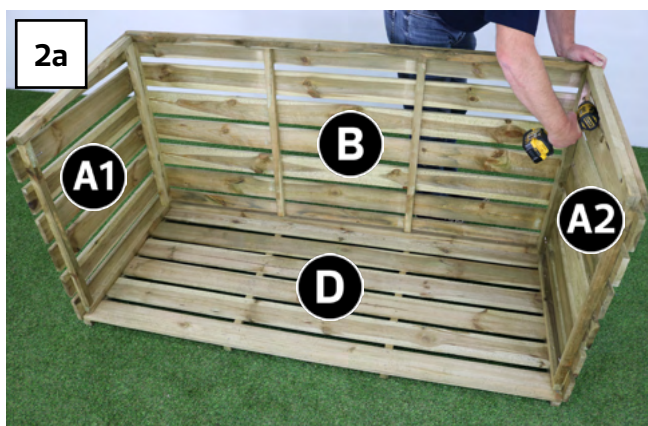


Fix Side Panel (A2) to Back Panel (B) using 2x 50mm screws placed evenly as per image.

Connect Front Panel (C) against Side Panel (A1) & (A2) using 2x 50mm screws. Repeat on other side.



Screw down Front Panel (C) to Floor Panel (D) using 3x 50mm screws in each section connecting the front panel.

3

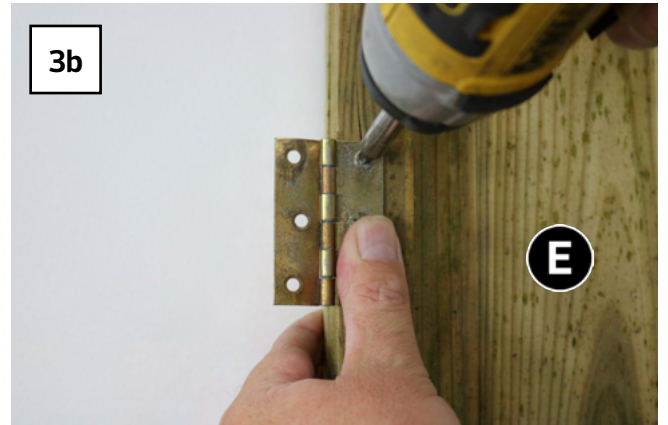

Attach the hinge to the Top Panel (E) 100mm from edge using 3x 30mm screws. Repeat on other side.

4

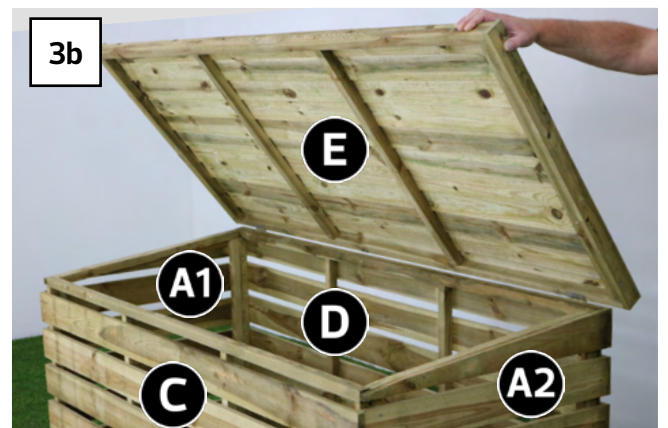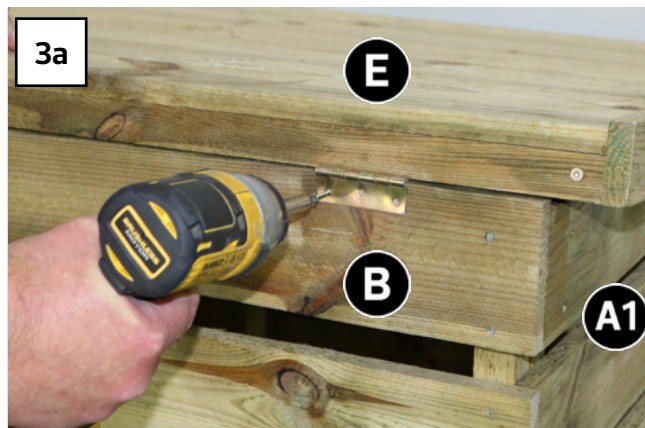

Fix Top Panel (E) to highest point spaced out evenly and secure using 3x 30mm. Repeat on other side.

4



Your Log Chest is now complete.